



DuPont™ Krytox® VPF

VACUUM PUMP FLUIDS

PRODUCT DATA SHEET

DuPont™ Krytox® vacuum pump fluids are used in applications where conventional vacuum pump oils cause safety, waste disposal and maintenance problems. They are nonflammable and eliminate the chance of fire in pumps. They are nonreactive and safe to use in oxygen systems. They can replace competitive PFPE fluids as well as any other type of vacuum fluid. Krytox® fluids do not contain acetal groups, which are susceptible to attack by Lewis acids. (See Figure 2 and Table 4.) This gives Krytox® superior stability as a vacuum pump fluid. Krytox® vacuum fluids are precisely distilled to provide low vapor pressures and give superior performance. (See Figure 1.) In addition, Krytox® fluids are recyclable.

Krytox® XP VPF oils contain a soluble additive to prevent rust. This patented additive enhances the performance of Krytox® VPF fluids, giving them improved performance properties. The long-term antirust properties repel moisture, providing extra protection from corrosion of metal parts and bearing surfaces.

While Krytox® VPF fluids are inert and nonreactive to all elastomers, plastics and metals, the soluble additives in the XP products have not been tested with all materials. Initial testing has shown no problems with DuPont™ Teflon®, Kalrez®, Viton®, nitrile and silicone rubbers. The performance of the soluble additives could degrade at temperatures more than 182°C (360°F) over a long period of time.

High-Vacuum Grease

Krytox® LVP is high vacuum grease formulated with a special low vapor pressure Krytox® oil for high-vacuum applications. It is also useful for sealing laboratory glassware connections and as a thread lubricant/sealant. For more information on Krytox® LVP, see Table 3.



The miracles of science™

Table 1
DuPont™ Krytox® Vacuum Pump Fluids*

| Property | Test | | DuPont™ Krytox® | | | | | | |
|--------------------------------|------------|-----------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------|
| | Method | Conditions | Units | 1506/1506XP | 1514/1514XP | 1525/1525XP | 1531/1531XP | 1618 | 16256 |
| Average Molecular Weight | NMR | | | 2160 | 2840 | 3470 | 3100 | 3130 | 9400 |
| Vapor Pressure** | Knudsen | 20°C (68°F) | torr | 4×10^{-7} | 2×10^{-7} | 1×10^{-7} | 1×10^{-7} | 5×10^{-9} | 3×10^{-14} |
| | | 50°C (122°F) | | 1×10^{-5} | 3×10^{-6} | 1×10^{-6} | 1×10^{-6} | 2×10^{-7} | 2×10^{-12} |
| | | 100°C (212°F) | | 1×10^{-3} | 1×10^{-4} | 3×10^{-5} | 3×10^{-5} | 2×10^{-5} | 1×10^{-9} |
| | | 200°C (392°F) | | 5×10^{-1} | 1×10^{-2} | 2×10^{-3} | 2×10^{-3} | 1×10^{-2} | 2×10^{-6} |
| Kinematic Viscosity | ASTM D445 | 20°C (68°F) | mm ² /s | 60 | 140 | 250 | 310 | 180 | 2560 |
| | | 50°C (122°F) | (cSt) | 15.5 | 32 | 52 | 63 | 39 | 437 |
| | | 100°C (212°F) | | 4.1 | 7.2 | 10.6 | 12.5 | 8.4 | 64.6 |
| Density | | 20°C (68°F) | g/cc | 1.88 | 1.89 | 1.90 | 1.90 | 1.89 | 1.92 |
| | | 50°C (122°F) | | 1.82 | 1.83 | 1.84 | 1.84 | 1.83 | 1.87 |
| | | 100°C (212°F) | | 1.73 | 1.74 | 1.75 | 1.75 | 1.74 | 1.78 |
| | | 200°C (392°F) | | 1.54 | 1.55 | 1.56 | 1.56 | 1.55 | 1.61 |
| Pour Point | ASTM D97 | | °C (°F) | -60 (-76) | -54 (-65) | -48 (-54) | -41 (-42) | -40 (-40) | -15 (5) |
| Distillation Range at 0.4 torr | ASTM D1160 | 10% | °C (°F) | 160 (320) | 200 (392) | 200 (392) | 200 (392) | 210 (410) | NA |
| | | 90% | | 220 (428) | 280 (536) | 300 (572) | 300 (572) | 280 (536) | NA |
| Heat of Vaporization | Knudsen | 150–250°C (302–482°F) | cal/g | 9 | 7 | 6 | 6 | 7 | NA |
| Volatility at 22 hr | ASTM D2595 | 121°C (250°F) | % | 6.5 | 1.3 | 0.6 | 0.4 | 0.3 | 0.2 |
| Surface Tension | | 25°C (77°F) | dyn/cm | 17 | 18 | 19 | 19 | 18 | 19 |

* This table gives typical properties based on historical production performance. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.

** Actual values are equal to or less than those indicated.

Table 2
Other Krytox® Fluids for Vacuum Service*

| Krytox® | Vapor Pressure, torr at 20°C (68°F) (Knudsen) | Kinematic Viscosity, mm ² /s (cSt at 20°C [68°F]) | Pour Point, °C (°F) |
|---------|--|---|---------------------|
| 16350 | 4×10^{-15} | 3500 | -5 (23) |
| 1645 | 5×10^{-12} | 450 | -35 (-31) |

*This table gives typical properties based on historical production performance. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.

Figure 1. Typical Vapor Pressure – Temperature Characteristics

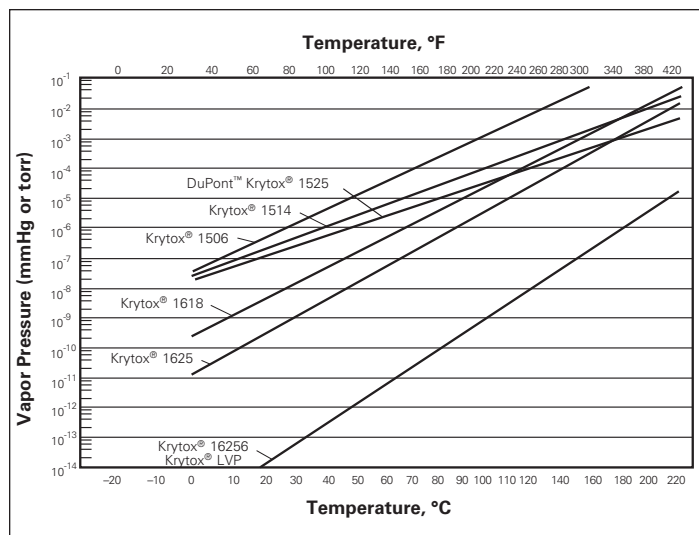


Table 3
Krytox® LVP High-Vacuum Grease*

| | |
|---|------------------------|
| Penetration (worked, 25°C [77°F]), mm/10 | 280 |
| NLGI Consistency Grade | 2 |
| Vapor Pressure | |
| torr at 20°C (68°F) | $<1.0 \times 10^{-13}$ |
| torr at 200°C (392°F) | $<1.0 \times 10^{-5}$ |
| kPa at 20°C (68°F) | $<1.3 \times 10^{-14}$ |
| kPa at 200°C (392°F) | $<1.3 \times 10^{-6}$ |
| Oil Separation (30 hr, 204°C [400 °F]), wt% | 13.8 |
| Evaporation Loss (22 hr, 204°C [400°F]), wt% | 0.3 |
| Density, (25°C [77°F]), g/cc | 1.94 |

*This table gives typical properties based on historical production performance. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.

Figure 2. Relative Weight Loss of PFPE Fluids in Presence of a Lewis Acid (90 min at 120°C [248°F] by ISOTGA)

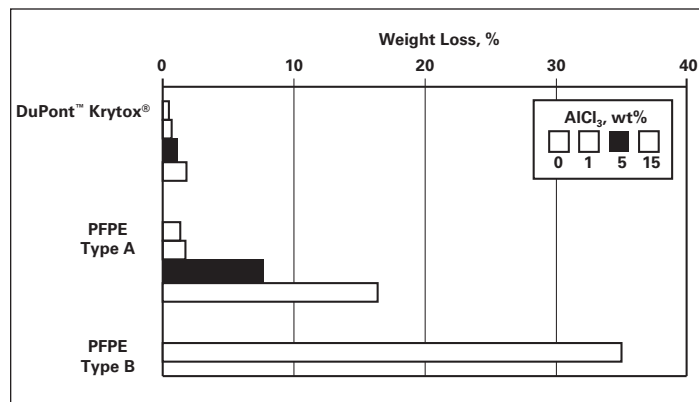


Table 4
Initial Temperature for Depolymerization*

| Fluid Type | °C (°F) |
|--|-----------|
| Perfluoroalky Ether Krytox® (no -O-CF ₂ -O- links) | 142 (287) |
| Type A (some -O-CF ₂ -O- links) | 102 (216) |
| Type B (many -O-CF ₂ -O- links and no shielding) | 72 (162) |
| Hydrocarbon | 79 (174) |
| Silicone | 58 (136) |
| Fluorosilicone | 82 (180) |

*This is the threshold temperature for the initial reaction in the presence of the Lewis Acid Aluminum Chloride as measured in a differential scanning calorimeter.

For more information or technical assistance, call: (800) 424-7502

United States (800) 424-7502

E-mail: krytox@usa.dupont.com

Canada (800) 387-2122

E-mail: products@can.dupont.com

Europe, Mideast, and Africa +41 22 717 5086

E-mail: lubricants@lux.dupont.com

Asia/Pacific—Including India—(65) 6586 3073

E-mail: krytox.lubricants@sgp.dupont.com

Mexico and Central America +011 52 55 5722 1150

E-mail: ceac@mex.dupont.com

South America—All Countries—55 11 4166 8601

E-mail: produtos.brasil@bra.dupont.com

www.krytox.com

Copyright © 2008 DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™ and Krytox® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

H-58530-3 (08/08) Printed in the U.S.A.

The information set forth herein is furnished free of charge and based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill and at their own discretion and risk. Because conditions of use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. Nothing herein is to be taken as license to operate under or a recommendation to infringe any patents.



The miracles of science™